


YAG20-1 \$39.60



Silver Flute Ribbon

- Kapton film membrane
- Copper conductors over 90% of surface
- Two rows of Neodymium bar magnets
- Wave guide flange
- Flat impedance
- 8 ohm
- 90 dB
- 3kHz to 20kHz frequency range
- 80 watt power handling @ 3kHz
- Flange: 3.5" x 6.25

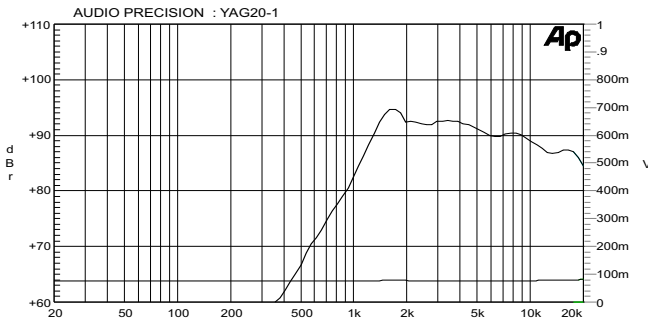


W14RC25-04 \$17.50



Silver Flute

- 5-1/2"
- Wool Cone
- Cast Frame
- 25mm VC Ø
- Vented Pole Piece
- Rubber Surround
- F3 of 75Hz in 0.2 ft³ ported enclosure

Re	3.7	Ohms	BL	5.07	TM
Sensitivity	90	dB	X-max	3.5	mm
Power	60	watts	Le @ 1kHz	0.52	mH
Fs	42.5	Hz	Frame Ø	142	mm
Qms	3.70		Cutout Ø	122	mm
Qes	0.31		Depth	67	mm
Qts	0.28		Krm	0.913	mΩ
Vas	19.0	Ltrs	Kxm	8.302	mH
Mms	7.95	g	Erms	0.840	
Cms	1767.6	μM/N	Exms	0.684	
Sd	0.0087	M ²	Box Rec.:	7 ltrs, 1.5"Ø V x 4.25" L	

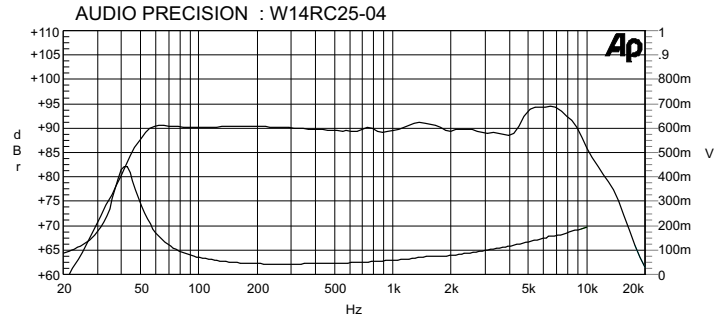


W14RC25-S-04 \$19.40



Silver Flute

- 5-1/2"
- Wool Cone
- Cast Frame
- **Shielded** Magnet
- 25mm VC Ø
- Rubber Surround
- F3 of 52Hz in 0.35 ft³ ported enclosure

Re	3.7	Ohms	BL	4.53	TM
Sensitivity	89	dB	X-max	3.5	mm
Power	60	watts	Le @ 1kHz	0.49	mH
Fs	48.2	Hz	Frame Ø	142	mm
Qms	4.06		Cutout Ø	122	mm
Qes	0.46		Depth	75	mm
Qts	0.41		Krm	1.100	mΩ
Vas	13.95	Ltrs	Kxm	7.405	mH
Mms	8.41	g	Erms	0.819	
Cms	1297.9	μM/N	Exms	0.690	
Sd	0.0087	M ²	Box Rec.:	10 ltrs, 1.5"Ø V x 4.4" L	

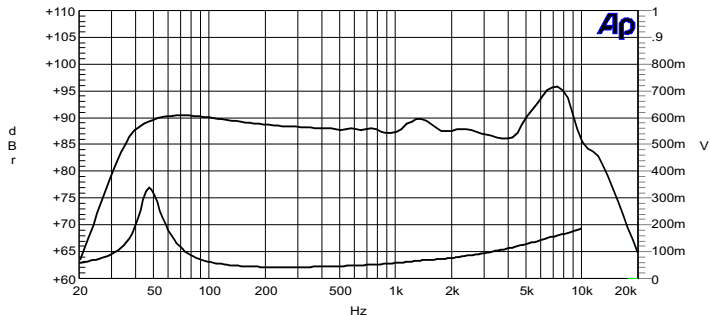


W14RC25-08 \$17.50



Silver Flute

- 5-1/2"
- Wool Cone
- Cast Frame
- 25mm VC Ø
- Vented Pole Piece
- Rubber Surround
- F3 of 55Hz in 0.35 ft³ ported enclosure

Re	7.3	Ohms	BL	6.24	TM
Sensitivity	87.5	dB	X-max	3.5	mm
Power	60	watts	Le @ 1kHz	0.77	mH
Fs	43.5	Hz	Frame Ø	142	mm
Qms	3.27		Cutout Ø	122	mm
Qes	0.39		Depth	67	mm
Qts	0.35		Krm	0.876	mΩ
Vas	18.9	Ltrs	Kxm	11.549	mH
Mms	7.58	g	Erms	0.882	
Cms	1760.5	μM/N	Exms	0.691	
Sd	0.0087	M ²	Box Rec.:	10 ltrs, 1.5" Ø V x 4.25" L	

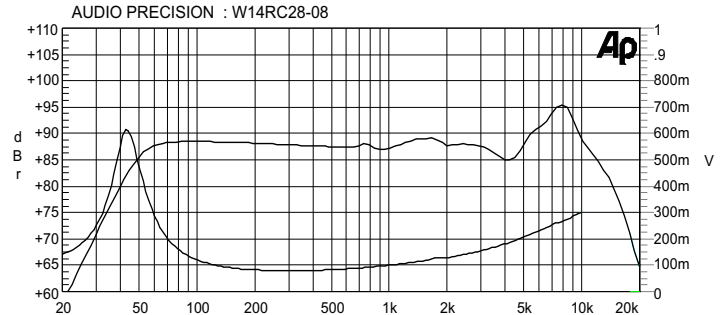

W14RC25-S-08 \$19.40



Silver Flute

- 5-1/2"
- **Shielded** Magnet
- Wool Cone
- Cast Frame
- 25mm VC Ø
- Rubber Surround
- F3 of 75Hz in 0.32 ft³ sealed enclosure

Re	7.3	Ohms	BL	5.76	TM
Sensitivity	87	dB	X-max	3.5	mm
Power	60	watts	Le @ 1kHz	0.79	mH
Fs	43.5	Hz	Frame Ø	142	mm
Qms	3.37		Cutout Ø	122	mm
Qes	0.46		Depth	75	mm
Qts	0.40		Krm	0.967	mΩ
Vas	18.9	Ltrs	Kxm	11.129	mH
Mms	7.63	g	Erm	0.875	
Cms	1757.5	μM/N	Exm	0.697	
Sd	0.0087	M ²	Box Rec.:	9 liters sealed	

W17RC38-04 \$24.60




Silver Flute


- 6-1/2"
- Wool Cone
- Cast Frame
- 38mm VC Ø
- Rubber Surround
- Vented Pole Piece
- F3 of 75Hz in 0.21 ft³ vented

Re	3.7	Ohms	BL	7.31	TM
Sensitivity	91.5	dB	X-max	5	mm
Power	80	watts	Le @ 1kHz	0.53	mH
Fs	37.5	Hz	Frame Ø	167	mm
Qms	1.52		Cutout Ø	147	mm
Qes	0.28		Depth	75	mm
Qts	0.24		Krm	1.370	mΩ
Vas	25.6	Ltrs	Kxm	17.805	mH
Mms	17.4	g	Erm	0.818	
Cms	1036.1	μM/N	Exm	0.599	
Sd	0.0132	M ²	Box Rec.:	6 liters vented 1.5" Ø x 5.5" L	

AUDIO PRECISION : W14RC25-S-08

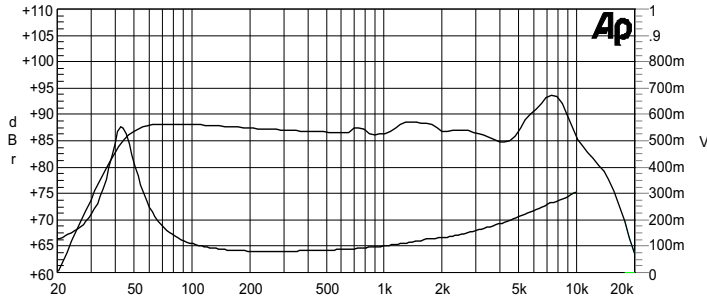

AUDIO PRECISION : W17RC38-04

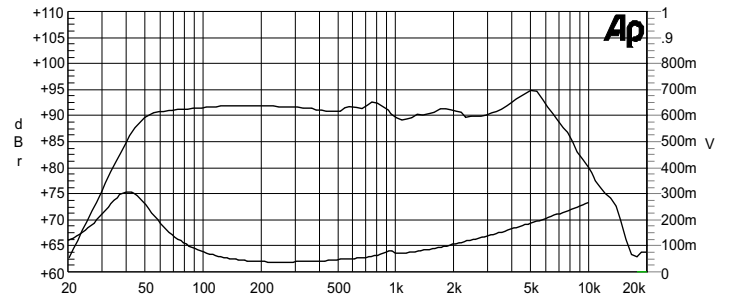

W17RC38-S-04 \$30.70



Silver Flute

- 6-1/2"
- Wool Cone
- **Shielded** Magnet
- Cast Frame
- 38mm VC Ø
- Rubber Surround
- F3 of 50Hz in 0.48 ft³ vented

Re	3.7	Ohms	BL	6.02	TM
Sensitivity	90	dB	X-max	5	mm
Power	80	watts	Le @ 1kHz	0.51	mH
Fs	43.1	Hz	Frame Ø	167	mm
Qms	1.83		Cutout Ø	147	mm
Qes	0.42		Depth	93	mm
Qts	0.34		Krm	1.025	mΩ
Vas	22.4	Ltrs	Kxm	15.716	mH
Mms	15.1	g	Erm	0.844	
Cms	903.8	μM/N	Exm	0.607	
Sd	0.0132	M ²	Box Rec.:	14 liters vented 2" Ø x 5.6" L	


W17RC38-08 \$24.60




Silver Flute

- 6-1/2"
- Wool Cone
- Cast Frame
- 38mm VC Ø
- Rubber Surround
- Vented Pole Piece
- F3 of 60Hz in 0.42 ft³ vented enclosure

Re	7.3	Ohms	BL	8.26	TM
Sensitivity	89	dB	X-max	5	mm
Power	80	watts	Le @ 1kHz	0.94	mH
Fs	40.5	Hz	Frame Ø	167	mm
Qms	1.52		Cutout Ø	147	mm
Qes	0.36		Depth	75	mm
Qts	0.29		Krm	2.001	mΩ
Vas	28.2	Ltrs	Kxm	36.187	mH
Mms	13.57	g	Erm	0.836	
Cms	1140.0	μM/N	Exm	0.582	
Sd	0.0132	M ²	Box Rec.:	12 ltrs, 2" Ø V x 6" L	

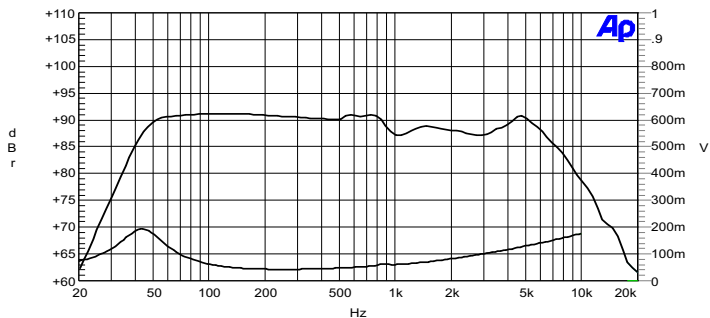

AUDIO PRECISION : W17RC38-08

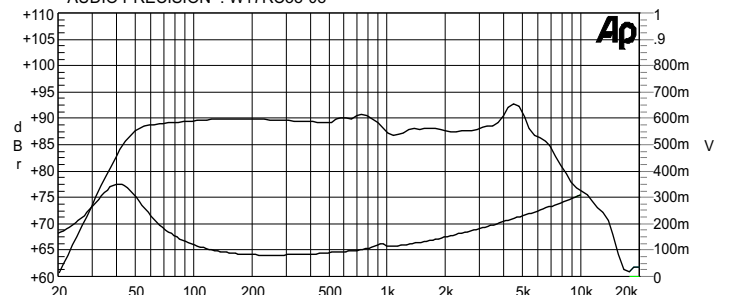

W17RC38-S-08 \$30.70

Silver Flute



- 6-1/2"
- Wool Cone
- **Shielded** Magnet
- Cast Frame
- 38mm VC Ø
- Rubber Surround
- F3 of 54Hz in 0.46 ft³ vented enclosure

W20RC38-04 \$31.20



Silver Flute



- 8"
- Wool Cone
- Cast Frame
- 38mm VC Ø
- Rubber Surround
- Vented Pole Piece
- F3 of 60Hz in 0.53ft³ vented enclosure

Re	7.3	Ohms	BL	8.33	TM
Sensitivity	88	dB	X-max	5	mm
Power	80	watts	Le @ 1kHz	0.89	mH
Fs	41.3	Hz	Frame Ø	167	mm
Qms	1.45		Cutout Ø	147	mm
Qes	0.40		Depth	93	mm
Qts	0.31		Krm	2.424	mΩ
Vas	24.3	Ltrs	Kxm	30.319	mH
Mms	15.1	g	Erm	0.815	
Cms	982.3	μM/N	Exm	0.597	
Sd	0.0132	M ²	Box Rec.:	13 ltrs, 2" Ø V x 6-1/4" L	

Re	3.7	Ohms	BL	7.9	TM
Sensitivity	93.7	dB	X-max	5	mm
Power	100	watts	Le @ 1kHz	0.52	mH
Fs	31.0	Hz	Frame Ø	203	mm
Qms	1.51		Cutout Ø	183	mm
Qes	0.27		Depth	86	mm
Qts	0.23		Krm	1.324	mΩ
Vas	72.3	Ltrs	Kxm	17.644	mH
Mms	23.7	g	Erm	0.819	
Cms	1111.3	μM/N	Exm	0.596	
Sd	0.0214	M ²	Box Rec.:	15 liters, 2" ØV x 3.75" L	

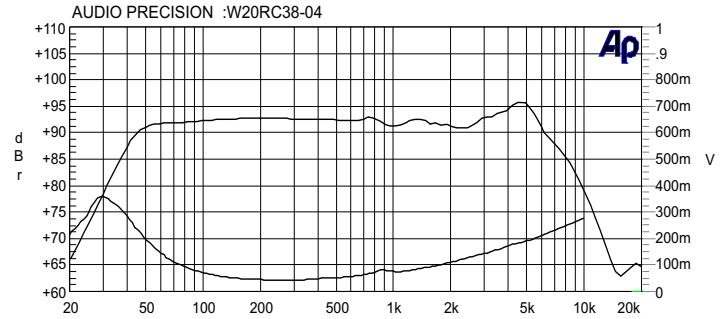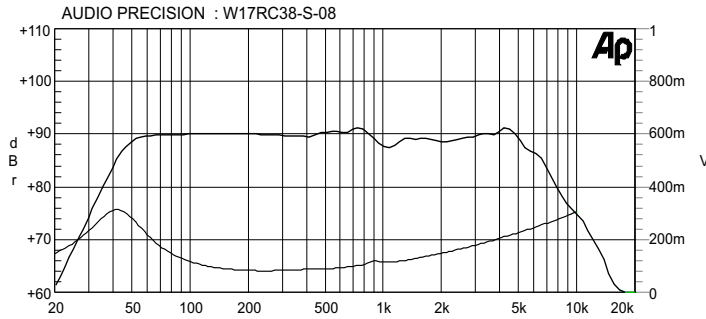

W20RC38-08 \$31.20

Silver Flute



- 8"
- Wool Cone
- Cast Frame
- 38mm VC Ø
- Rubber Surround
- Vented Pole Piece
- F3 of 60Hz in 0.64 ft³ vented enclosure

W20RC38-S-08 \$38.95

Silver Flute



- 8"
- Wool Cone
- Cast Frame
- 38mm VC Ø
- Rubber Surround
- **Shielded** magnet
- F3 of 45Hz in 1 ft³ vented enclosure

Re	7.3	Ohms	BL	10.1	TM
Sensitivity	91	dB	X-max	5	mm
Power	100	watts	Le @ 1kHz	0.92	mH
Fs	30.8	Hz	Frame Ø	203	mm
Qms	1.30		Cutout Ø	183	mm
Qes	0.28		Depth	86	mm
Qts	0.23		Krm	1.65	mΩ
Vas	83.3	Ltrs	Kxm	32.793	mH
Mms	20.9	g	Erm	0.853	
Cms	1281.1	μM/N	Exm	0.591	
Sd	0.0214	M ²	Box Rec.:	16 ltrs, 2" Ø V x 4" L	

Re	7.3	Ohms	BL	7.57	TM
Sensitivity	88	dB	X-max	5	mm
Power	100	watts	Le @ 1kHz	0.92	mH
Fs	29.5	Hz	Frame Ø	203	mm
Qms	1.81		Cutout Ø	183	mm
Qes	0.53		Depth	103	mm
Qts	0.41		Krm	1.754	mΩ
Vas	84.7	Ltrs	Kxm	25.339	mH
Mms	22.3	g	Erm	0.849	
Cms	1302.1	μM/N	Exm	0.620	
Sd	0.0214	M ²	Box Rec.:	30 ltrs, 2" Ø V x 3.75" L	

